

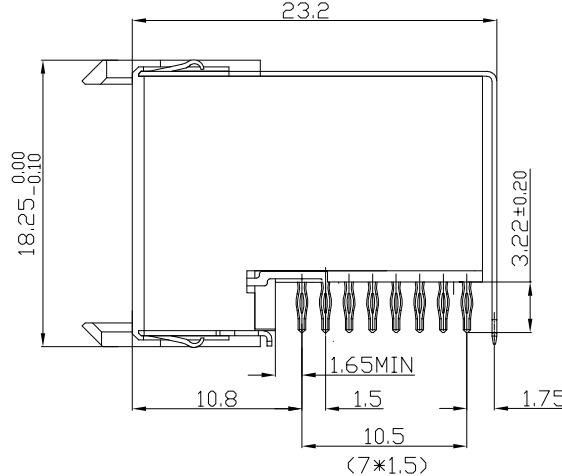
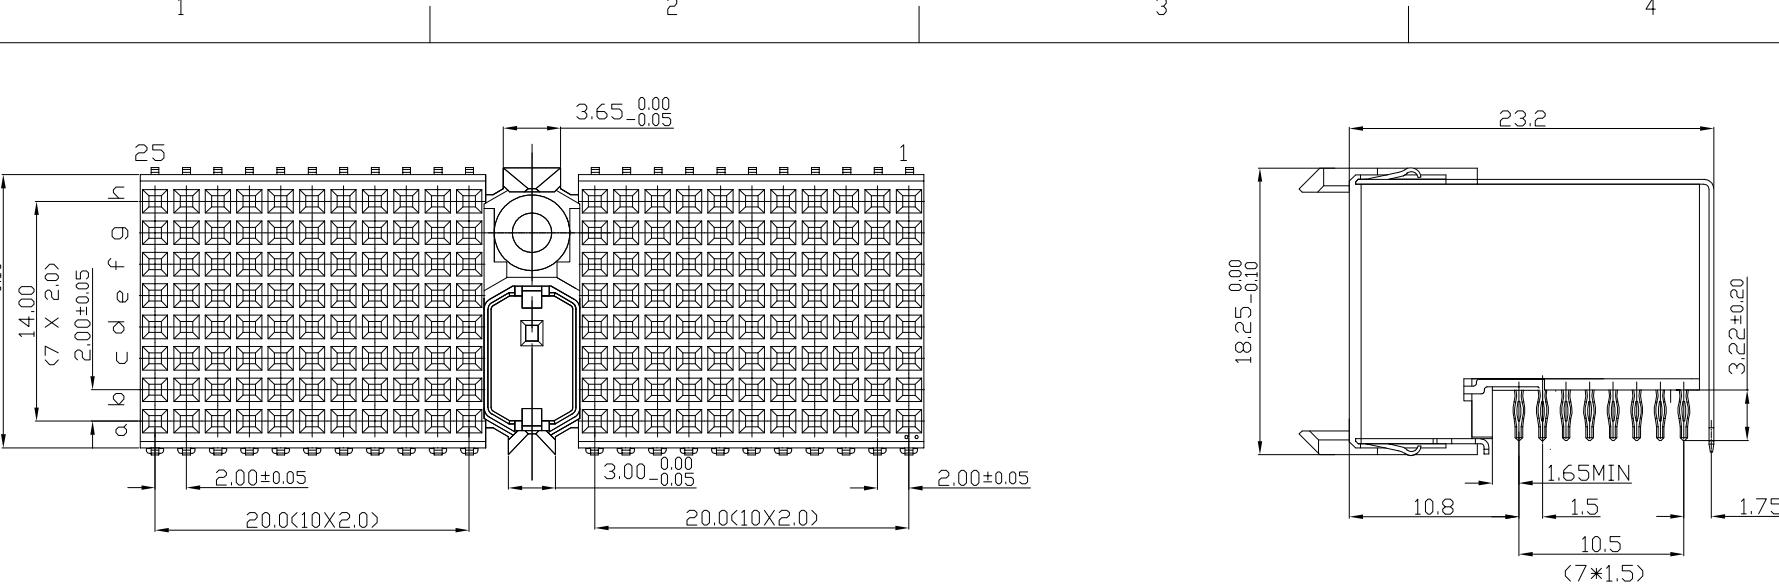
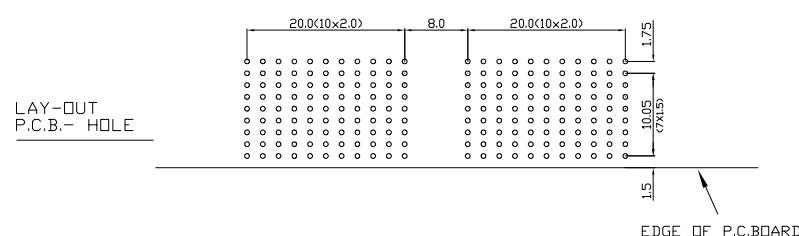
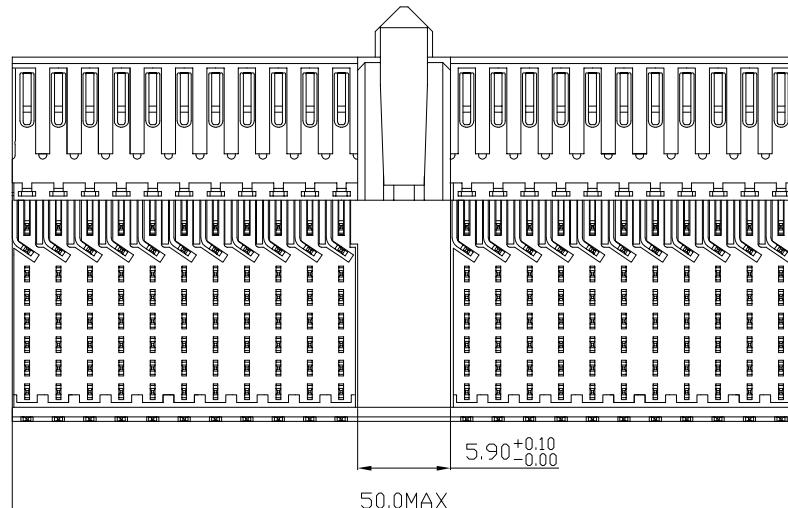


All rights strictly reserved.
 Reproduction or issue to third parties in any form
 whatever is not permitted without written
 authority from the proprietor.
 Property of FCI. Copyright FCI.

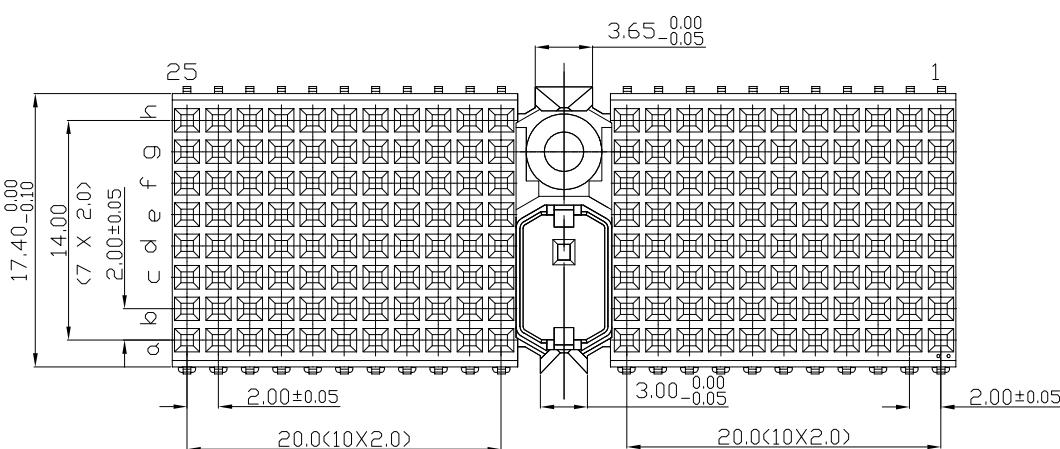

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

LAY-OUT P.C.B.- HOLE

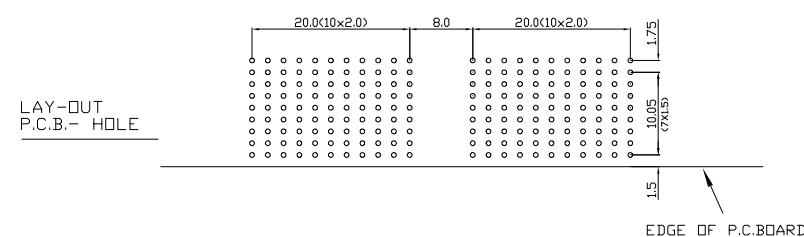

PERFORMANCE CHARACTERISTICS

CURRENT RATING : 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE : 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE 20 MΩ MAX
 INSERTION FORCE : 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN/CONT
 INSULATION RESISTANCE : 10^4 MΩ MIN

NOTES 1' LEAD FREE INDICATOR : LF=LEAD FREE
 PERFORMANCE LEVEL INDICATOR
 (REF. DWG NUBSC 201844.003)

2. THIS PRODUCT IS CSA APPROVED.
 THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
 BSA.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
 OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION_06	KN	14-09-01
B	DG05-0278	Kason	10-10-05
C	DG07-0362	Kason	05-09-07
D	DG10-0110	NZ	05/30/10



www.fciconnect.com



tolerance
 1DEC ±0.2 1DEC
 2DEC ±0.1 2DEC
 ANGLES ±1° HOEKEN

projection

MM

size
 A4

Scale
 3/1

ECN

Rev.

BS,C ,202260,004

catalog no	dwg no	customer	sheet 1 of 1
HM2R81PA8101----			