



Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

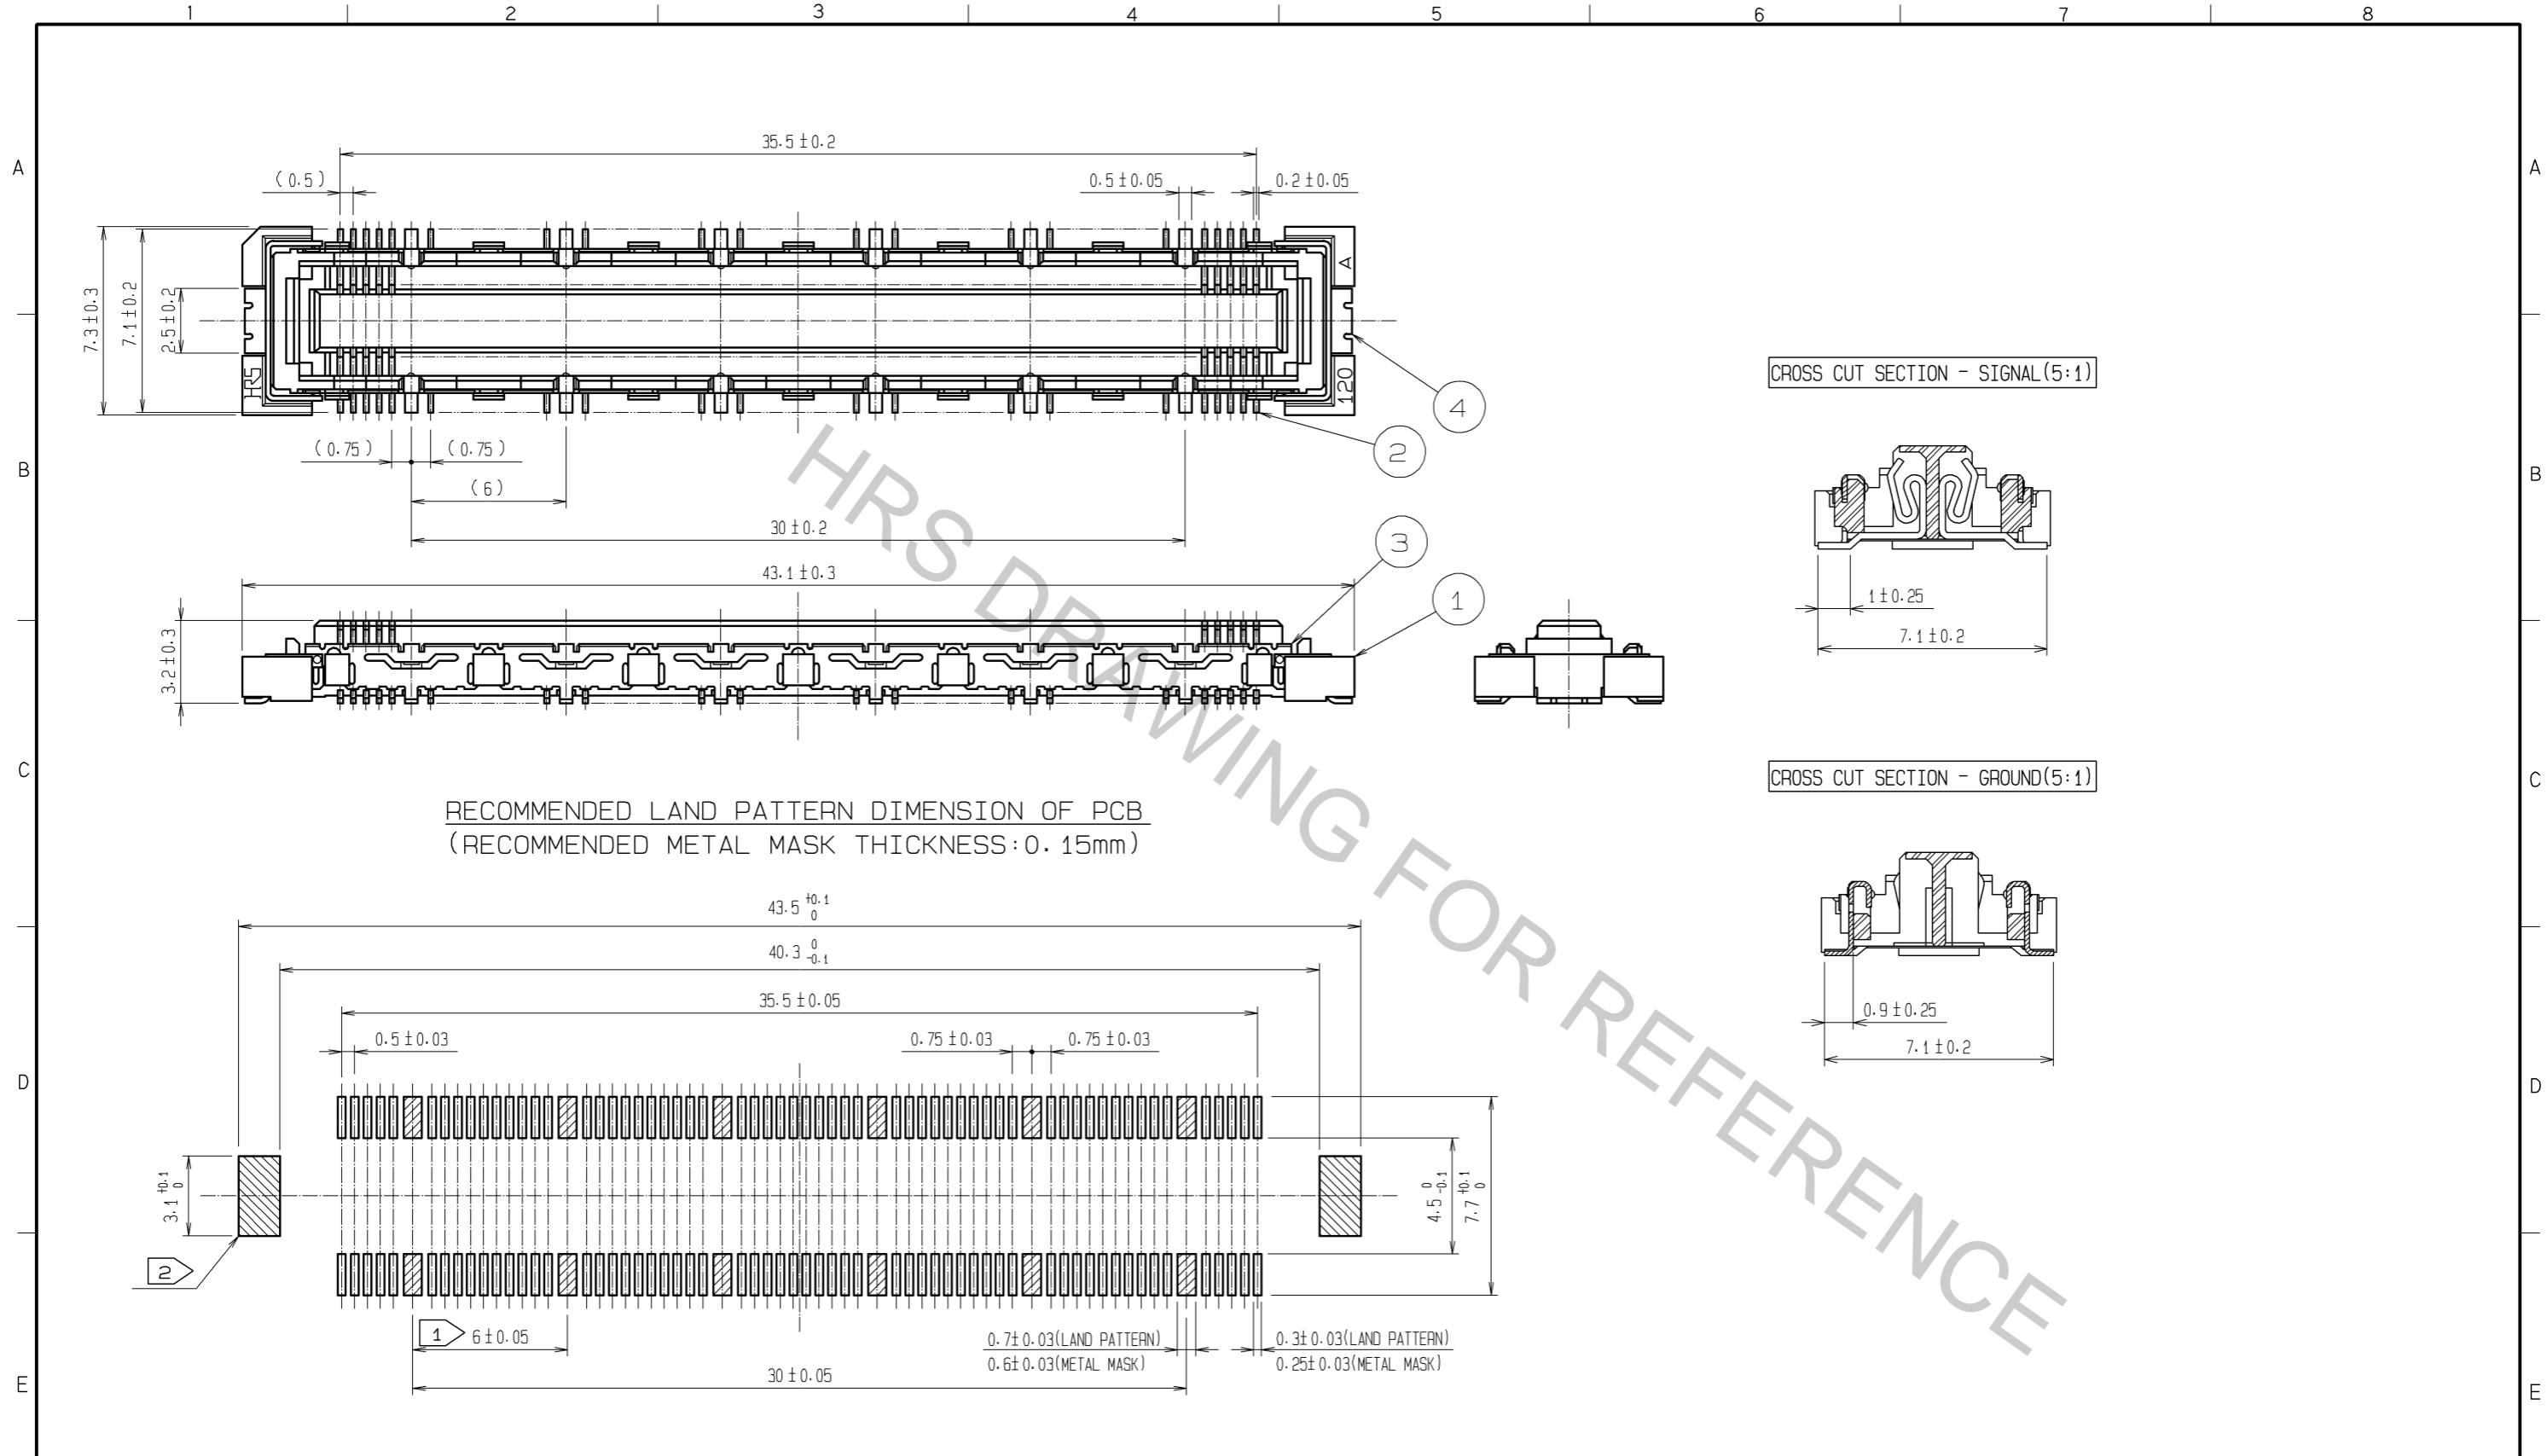

RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

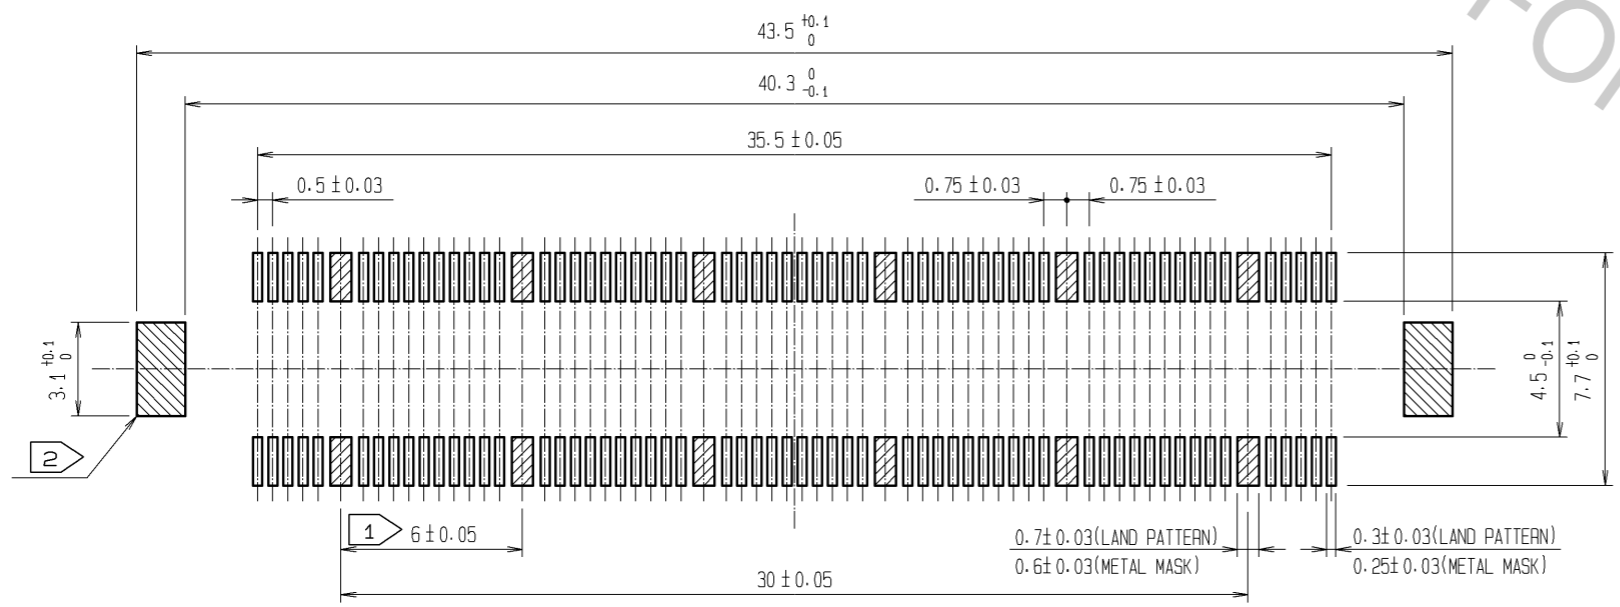

- NOTES
- ① 12 HATCHED PARTS: GROUND CIRCUIT.
 - ② 2 HATCHED PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

| | | | | | | | | |
|--------------------------------------|----------|------------------------|----------|--------------------------|-----------------|---|---------|------|
| 1 | LCP | BEIGE | UL94V-0 | 3, 4 | PHOSPHOR BRONZE | TIN-PLATING | | |
| NO. | MATERIAL | FINISH | REMARKS | NO. | MATERIAL | FINISH, REMARKS | | |
| | | | | 2 | PHOSPHOR BRONZE | CONTACT AREA : GOLD 0.1μm min. LEAD AREA : GOLD FLASH UNDER PLATING : NICKEL 1μm min. | | |
| UNITS | | SCALE | COUNT | DESCRIPTION OF REVISIONS | | DESIGNED | CHECKED | DATE |
| mm | | 4 : 1 | △ | | | | | |
| HRS HIROSE ELECTRIC CO., LTD. | | APPROVED : HS. OKAWA | 08.06.26 | DRAWING NO. | | EDC3-151982-25 | | |
| | | CHECED : HT. YAMAGUCHI | 08.06.25 | PART NO. | | FX10B-120S/12-SV(71) | | |
| | | DESIGNED : SY. KAMIGA | 08.06.23 | CODE NO. | | CL570-0223-7-71 | | |
| | | DRAWN : HK. SUNADORI | 08.06.18 | | | △ 1/1 | | |