
## MALLORY Mallory Sonalert Products, Inc. Part #: SC2036ACP **Sales Outline Drawing** Revision:

**Specifications:** 

Sound Level Category	Medium			
Mode of Operation	Single Pulse, Chime			
Voltage Rating	30 to 110 VAC/DC			
Frequency	1000 ± 100 Hz			
Loudness @ 2 FT	70 to 81 dB(A) Typ.			
Loudness @ Min Vdc	55 dB(A) @ 2 Feet and 30 Vac/dc			
Loudness @ Max Vdc	75 dB(A) @ 2 Feet and 110 Vac/dc			
Current Draw	30mA MAX			
Housing Material	6/6 Nylon, Color: Black			
Storage Temperature	-40° to +85° C			
Operating Temperature	-30° to +65° C			
Panel Mounting	Recommended hole size is 1.25"(31.75mm). Thread rent will fit standard 30mm(1.181") hole.			
Knurled Nut	Used to attach part to panel. The max recommended torque is 10 in-lbs.			
Weight (Typical)	1.8 oz (5 <mark>1</mark> g)			
NEMA 3R,4X, & 12	Approved with use of ACC03.			
Options	Please contact factory.			

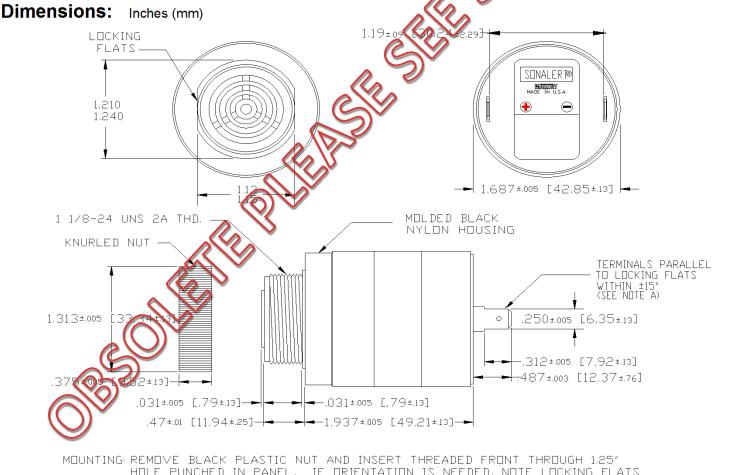

HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING, SCREW NUT BACK ON. DO NOT OVERTIGHTEN.