## SRXCOOL12K

## SmartRack® Self-Contained Portable Air Conditioning Unit









**Dehumidifies Air** 



Intuitive LCD Screen



12,000 BTU

**Effective Spot Cooling** 


CEE 7/7 Plug

- A Control Panel
- **B** Recessed Handles Air Filter Covers
- Drainage Outlet
- **E** Casters
- F Front Panel
- G Cool Air Output
- H Louvered Vent Insert (Pre-Installed)
- Cooling Duct Adapter
- Rear Panel
- **K** Warm Air Exhaust
- **L** Evaporator Drainage Outlet
- M Evaporator Filter
- N Condenser Filter
- Remote Monitoring Jack

## **Control Panel**

- P "POWER" Button
- **Q** "FUNCTION" Button
- R "TIMER" Button
- S "FAN SPEED" Button
- T "QUIET" Button
- **■** Temperature Control Buttons
- V LCD Screen
- W Operating Mode LEDs
- X Fan Speed Mode LEDs

OR	
	B
H	K
F——	
E	E
FRONT VIEW	BACK VIEW

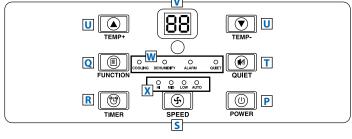


- Offers 12,000 BTU of hot-spot and general room cooling with two exchangeable vent styles
- Compact, portable, self-contained design with built-in evaporator reduces maintenance—no water collection tank or drain required
- · Filters and dehumidifies air to protect equipment
- Features remote control, management and true spot cooling capabilities (requires optional SRCOOLNET Web Management Accessory, sold separately)


## SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS





1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Specifications	
Model	SRXCOOL12K
Cooling Capacity	12,000 BTU / 3.5 kW
Input Voltage / Frequency	230V AC / 50 Hz
Power Consumption	1250W Max.
Input Cord / Connector	1.8 m / Schuko CEE 7/7
Unit Dimensions (H x W x D)	778 x 300 x 505 mm
Shipping Dimensions (H x W x D)	850 x 385 x 740 mm
Unit Weight	33.6 kg
Shipping Weight	35 kg
Standards	Tested to CE, RoHS; R410A Refrigerant

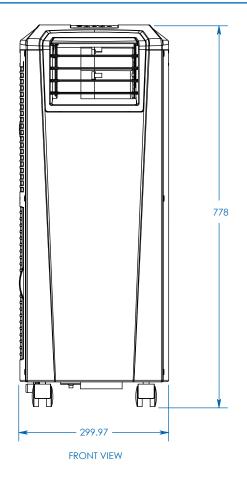

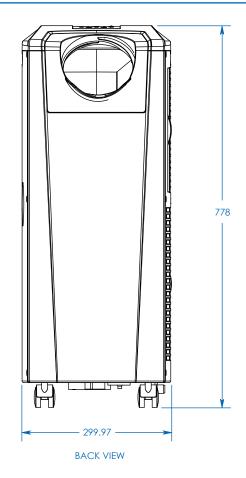

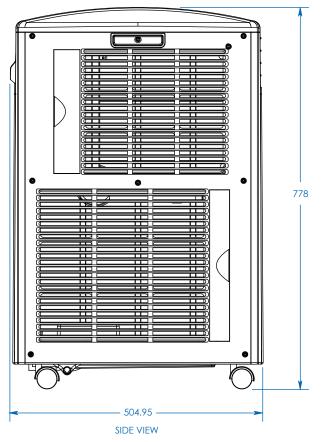



MODEL:
SRXCOOL12K



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Dimensions: mm

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.