


UNIT:mm

10000±100

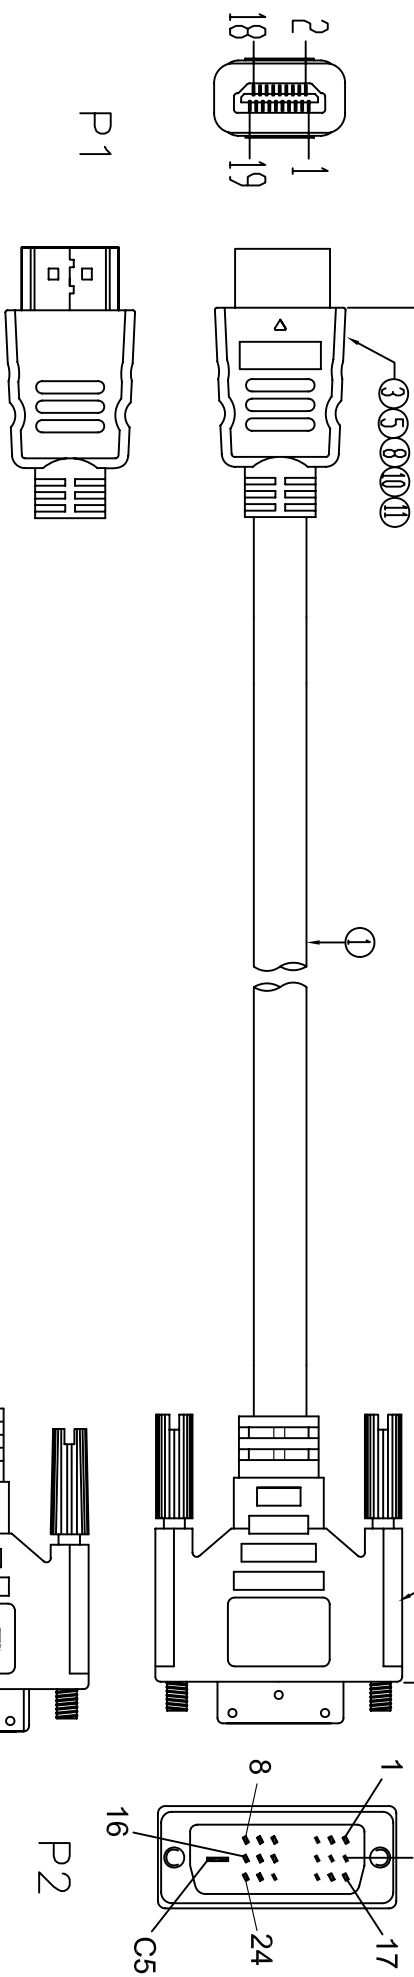

Electronic Test:
 1.100% Test,(Open,Short,Miss Wire)
 2.Contact Resistance:2 ohm max.
 3.Insulation Resistance:10M ohm min.
 4.Hi-Pot:300V DC/10ms
 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

CNC Tech, LLC
 Industrial Cable and Connector Technology

NO.	NAME	Q'TY	SPECIFICATION
①	TUBE	8	HEAT SHRINK TUBE BLACK OD3.0mm L=7mm.
		2	HEAT SHRINK TUBE BLACK OD2.0mm L=15mm.
⑧	HEAT SHRINK TUBE BLACK OD1.5mm L=25mm.	8	
⑩	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W13mm*L30mm	1	
⑨	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm	1	
⑧	CLEAR PE(NM-18)	4g	
⑦	CLEAR PE(NM-15)	4g	
⑥	BLACK PVC 40P(WM-17)	15g	
⑤	BLACK PVC 40P (WM-39)	8g	
④	SCREW #4*40UNS Ø2.8*L32mm NICKEL MOLD BLACK ABS	2	
③	CONN HDML 19P MALE PIN G/F, SHELL NICKEL	1	
②	CONN DV(18+1) MALE INSULATION BLACK.SHELL NICKEL,PIN GOLD FLASH.	1	
①	CABLE	1	UL20276 [(30AWG*1P+DW+AL/MY)*4]+28AWG*7C+AL/MY+D.W+BD+JACKET:BLACK OD:5.7±0.15mm L=10000+60/-0mm.

DRAWN BY	ZHONGHS	DRAWING NO.	VG/LJQ-094-005
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	741-20010-01000
DECIDE BY		DATE	2012-02-14
VERSIONS/EDITION	A/0	PROJECTION	